

XPIR SERIES READERS

Kiosk, Desktop,
Wall & Pole Mount

Intelligent fixed ID readers designed to secure any workplace entrance

CPU

Processor	4 Core RK3288 (opt. RK3399 6 Core)
Operating System	Android 7.1
Memory	8GB ROM (optional 16GB or 32GB)
Filling Light	LED and Infrared Double Filling Light

Readers

Contactless Card Reader	LF: (125KHz): HID, Indala, EM, AWID, CasiRusco, Pyramid, SecuraKey HF: (13.56MHz): iClass, SEOS, Allegion, DESFire, Mifare, PIV, ISO14443, ISO15693
Fingerprint Reader	(optional) Supports ANSI 378, ISO 19794:2;4

Screen

Screen Size	8" Touch Screen LCD
Resolution	1280 x 800

Camera


Pixel	200W Pixels, 130W Infrared Camera
Type	Wide Dynamic Camera
Focus Distance	19.6 in - 59 in (50 cm - 150 cm)

Interface

Audio	2.5W / 4R Speaker
Network Interface	Ethernet (RJ45), WiFi (optional 4G)
Serial Interface	1 RS232 Serial Port
USB Interface	1 USB OTG, 1 USB Host Standard A Port
Relay Output Interface	1 Door Open Signal Output
Wiegand Interface	1 Wiegand 26/34 Output

General Parameters

Power Supply	DC12V (10%)
Operating Temperature	14°F to 140°F (-10°C to 60°C)
Working Humidity	10% to 90%
Power Consumption	10W Max
Installation Method	Turnstile, Wall, Pole, Desktop, Stand-Alone Kiosk
Protection Level	IP64, Some Dustproof / Waterproof Functionality

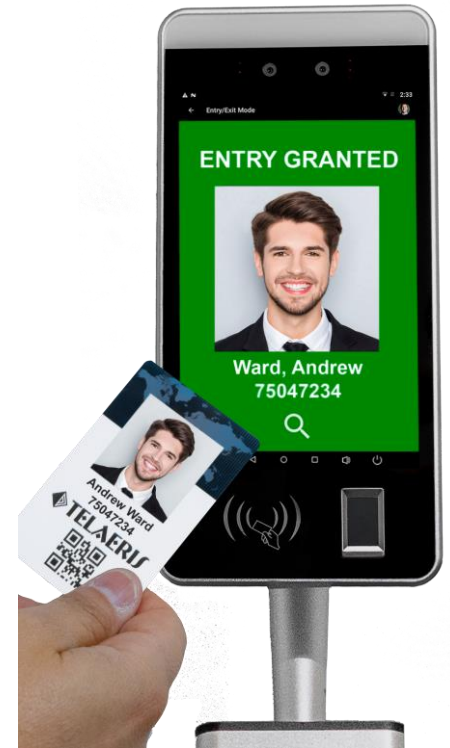

XPIR Desktop / Pole Mount



XPIR Standalone Kiosk