

XPIR SERIES READERS

Kiosk, Desktop,
Wall & Pole Mount

Intelligent fixed ID readers designed to secure any workplace entrance

CPU

Processor	4 Core RK3288 (opt. RK3399 6 Core)
Operating System	Android 7.1
Memory	8GB ROM (optional 16GB or 32GB)
Filling Light	LED and Infrared Double Filling Light

Readers

LF Tags (125KHz)	HID, Indala, FarPointe, EM, CasiRusco, Pyramid, Securakey
HF Tags (13.56 MHz)	iClass, SEOS, Mifare, DESFire (EV1, EV2, EV3), PIV, CAC, TWIC, Felicia, Legic, Allegion, Stid, ISO14443, ISO15693, ISO14443 A/B, Gallagher, Paxton
UHF Tags	EPC GEN2, ISO 18000-6C
Mobile Credentials	HID Mobile Access, Safetrust, BLE, NFC
Fingerprint Reader	(optional) Supports ANSI 378, ISO 19794:2;4

Screen

Screen Size	8" Touch Screen LCD
Resolution	1280 x 800

Camera


Pixel	200W Pixels, 130W Infrared Camera
Type	Wide Dynamic Camera
Focus Distance	19.6 in - 59 in (50 cm - 150 cm)

Interface

Audio	2.5W / 4R Speaker
Network Interface	Ethernet (RJ45), WiFi (optional 4G)
Serial Interface	1 RS232 Serial Port
USB Interface	1 USB OTG, 1 USB Host Standard A Port
Relay Output Interface	1 Door Open Signal Output
Wiegand Interface	1 Wiegand 26/34 Output

General Parameters

Power Supply	DC12V (10%)
Operating Temperature	14°F to 140°F (-10°C to 60°C)
Working Humidity	10% to 90%
Power Consumption	10W Max
Installation Method	Turnstile, Wall, Pole, Desktop, Stand-Alone Kiosk
Protection Level	IP64, Some Dustproof / Waterproof Functionality

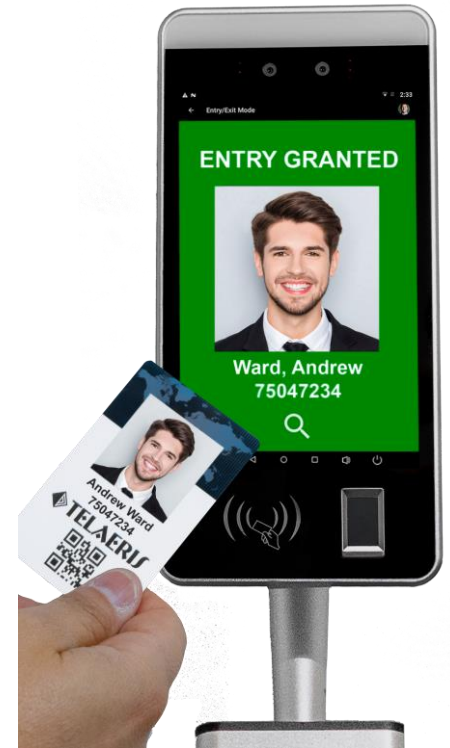

XPIR Desktop / Pole Mount



XPIR Standalone Kiosk



4101 Randolph Street
San Diego, CA 92103 - USA

PHONE +1 858.627.9700
FAX +1 858.627.9702

www.telaeris.com
sales@telaeris.com